


keyboard tray for 4:3 PRO devices, inclination adjustable, color: RAL9023 (gray), including 2 USB interfaces, with USB cable length: 1.25 m, scope of supply: 1 keyboard tray

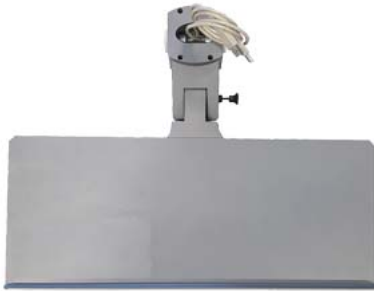

General information	
Product type designation	Tray incl. 2x USB
Control elements	
Connection type	
<ul style="list-style-type: none"> <li>• USB</li> <li>• PS/2</li> <li>• Cable length</li> </ul>	Yes; USB 2.0 No 500 mm; Typical
Frame size/design	
<ul style="list-style-type: none"> <li>• Standard</li> <li>• Ergonomic</li> </ul>	Yes; For industrial applications Yes; 90° adjustable / tiltable
Ergonomics	
<ul style="list-style-type: none"> <li>• Trackball rest</li> <li>• Adjustable height</li> </ul>	No Yes; By adjusting inclination angle 0° to 90°
Installation type/mounting	
Mounting	Max. load bearing capacity of 2 kg
Mounting type	Suitable for PRO devices
Mounting position	Horizontal
maximum permissible angle of inclination without external ventilation	90°; Between 0° and 90° in steps of 15°
Interfaces	
Number of USB interfaces	2; USB 2.0
Degree and class of protection	
IP (all-round)	IP65 fully enclosed (when protective cover is closed)
Standards, approvals, certificates	
RoHS conformity	Yes
Ambient conditions	
Ambient temperature during operation	
<ul style="list-style-type: none"> <li>• min.</li> <li>• max.</li> </ul>	0 °C 45 °C
Operation (vertical installation)	
<ul style="list-style-type: none"> <li>— For vertical installation, min.</li> <li>— For vertical installation, max.</li> </ul>	0 °C 45 °C
Operation (max. tilt angle)	
<ul style="list-style-type: none"> <li>— At maximum tilt angle, min.</li> <li>— At maximum tilt angle, max.</li> </ul>	0 °C 45 °C
Operation (max. tilt angle, portrait format)	
<ul style="list-style-type: none"> <li>— At maximum tilt angle, min.</li> <li>— At maximum tilt angle, max.</li> </ul>	0 °C 45 °C
Ambient temperature during storage/transportation	

• min.	0 °C
• max.	50 °C
<b>Relative humidity</b>	
• Operation, max.	80 %; no condensation
• Condensation permissible	No; Condensation not permissible

**Mechanics/material**

Material	
• Aluminum	Yes; Powder-coated, RAL 9023

**Dimensions**

Width	500 mm
Height	64 mm
Depth	200 mm

**Weights**

Weight (without packaging)	3 000 g
Weight (with packaging)	4 600 g

**Scope of supply**

Delivery quantity in pieces	1; With support arm bracket, without keyboard
-----------------------------	---

**Other**

Merchandise	Yes; Sasse no. 1580.9906124
Manufacturer name	Sasse Elektronik GmbH
Manufacturer's address	Berliner Straße 12, 91126 Schwabach, Germany
Target devices	Merchandise suitable for 4:3 PRO devices

**Classifications**

	Version	Classification
eClass	14	27-33-02-92
eClass	12	27-33-02-92
eClass	9.1	27-33-02-92
eClass	9	27-33-02-92
eClass	8	27-24-92-03
eClass	7.1	27-24-92-03
eClass	6	27-24-92-03
ETIM	10	EC002584
ETIM	9	EC002584
ETIM	8	EC002584
ETIM	7	EC002584
IDEA	4	3552
UNSPSC	15	32-15-17-03

**Approvals / Certificates**

**General Product Approval**

[Manufacturer Declaration](#)      [China RoHS](#)

**Further information**

Usable in the following products: Detailed information can be found in the cross-list, which is available for download in the following SIOS note: 40466415  
<https://support.industry.siemens.com/cs/document/40466415/status-of-the-simatic-hmi-accessories-and-cross-list-update?dti=0&lc=en-WW>

last modified: 5/22/2024 