



Figure similar

SIMATIC S7-1500, digital output module DQ 16x 230V AC/2A ST; relay 16 channels in groups of 2; 4 A per group; switching cycle counter for integrated relay, diagnostics; substitute value: the module supports the safety-oriented shutdown of load groups up to SIL1 according to EN IEC 62061:2021 and Category 2 / PL c according to EN ISO 13849-1:2015. front connector (screw terminals or push-in) to be ordered separately

General information	
Product type designation	DQ 16x 230 V AC/2 A ST (relay)
HW functional status	FS01
Firmware version	V1.1.0
<ul style="list-style-type: none"> <li>FW update possible</li> </ul>	Yes
Product function	
<ul style="list-style-type: none"> <li>I&amp;M data</li> </ul>	Yes; I&M0 to I&M3
<ul style="list-style-type: none"> <li>Isochronous mode</li> </ul>	No
<ul style="list-style-type: none"> <li>Prioritized startup</li> </ul>	Yes
Engineering with	
<ul style="list-style-type: none"> <li>STEP 7 TIA Portal configurable/integrated from version</li> </ul>	V13 SP1 / -
<ul style="list-style-type: none"> <li>STEP 7 configurable/integrated from version</li> </ul>	V5.5 SP3 / -
<ul style="list-style-type: none"> <li>PROFIBUS from GSD version/GSD revision</li> </ul>	V1.0 / V5.1
<ul style="list-style-type: none"> <li>PROFINET from GSD version/GSD revision</li> </ul>	V2.3 / -
Operating mode	
<ul style="list-style-type: none"> <li>DQ</li> </ul>	Yes
<ul style="list-style-type: none"> <li>DQ with energy-saving function</li> </ul>	No
<ul style="list-style-type: none"> <li>PWM</li> </ul>	No
<ul style="list-style-type: none"> <li>Cam control (switching at comparison values)</li> </ul>	No
<ul style="list-style-type: none"> <li>Oversampling</li> </ul>	No
<ul style="list-style-type: none"> <li>MSO</li> </ul>	Yes
<ul style="list-style-type: none"> <li>Integrated operating cycle counter</li> </ul>	Yes; FW V1.1.0 or higher
Supply voltage	
Rated value (DC)	24 V
permissible range, lower limit (DC)	19.2 V
permissible range, upper limit (DC)	28.8 V
Reverse polarity protection	Yes
Input current	
Current consumption, max.	185 mA
Output voltage	
Rated value (AC)	230 V; 24 V DC to 120 V DC / 24 V AC to 230 V AC
Power	
Power consumption from the backplane bus	0.8 W
Power loss	
Power loss, typ.	5 W

Address area	
Address space per module	
• Inputs	0 byte
• Outputs	2 byte
Digital outputs	
Type of digital output	Relays
Number of digital outputs	16
Current-sinking	Yes
Current-sourcing	Yes
Digital outputs, parameterizable	Yes
Short-circuit protection	No
Controlling a digital input	Yes
Size of motor starters according to NEMA, max.	5
Digital output functions, parameterizable	
• Switching tripped by comparison values	No
• Freely usable digital output	No
• PWM output	No
• Digital output with oversampling	No
Switching capacity of the outputs	
• with resistive load, max.	2 A
• on lamp load, max.	50 W (230 V AC), 5 W (24 V DC)
Output current	
• for signal "1" rated value	2 A
• for signal "1" permissible range, min.	10 mA; 10 V
• for signal "1" permissible range, max.	2 A; thermal continuous current
• for signal "0" residual current, max.	0 A
Parallel switching of two outputs	
• for logic links	Yes
• for uprating	No
• for redundant control of a load	Yes
Switching frequency	
• with resistive load, max.	1 Hz
• with inductive load, max.	0.5 Hz
• on lamp load, max.	1 Hz
Total current of the outputs	
• Current per channel, max.	2 A; see additional description in the manual
• Current per group, max.	4 A; see additional description in the manual
• Current per module, max.	32 A; see additional description in the manual
Relay outputs	
• Number of relay outputs	16
• Rated supply voltage of relay coil L+ (DC)	24 V
• Current consumption of relays (coil current of all relays), typ.	150 mA
• external protection for relay outputs	Miniature circuit breaker B10 / B16
• Contact connection (internal)	No
• Number of operating cycles, max.	see additional description in the manual
Switching capacity of contacts	
— with inductive load, max.	2 A; see additional description in the manual
— with resistive load, max.	2 A; see additional description in the manual
Cable length	
• shielded, max.	1 000 m
• unshielded, max.	600 m
Interrupts/diagnostics/status information	
Diagnostics function	No
Substitute values connectable	Yes
Alarms	
• Diagnostic alarm	Yes
• Maintenance interrupt	Yes; maintenance alarm for switching cycle counter
Diagnoses	

• Monitoring the supply voltage	Yes
• Wire break	No
• Short-circuit	No
• Group error	No
<b>Diagnostics indication LED</b>	
• RUN LED	Yes; green LED
• ERROR LED	Yes; red LED
• MAINT LED	Yes; Yellow LED
• Monitoring of the supply voltage (PWR-LED)	Yes; green LED
• Channel status display	Yes; green LED
• for channel diagnostics	No
• for module diagnostics	Yes; red LED
<b>Potential separation</b>	
<b>Potential separation channels</b>	
• between the channels	No
• between the channels, in groups of	2
• between the channels and backplane bus	Yes
• Between the channels and load voltage L+	Yes
<b>Permissible potential difference</b>	
between different circuits	250 V AC between the channels and the supply voltage L+; 250 V AC between the channels and the backplane bus; 500 V AC between the channels
<b>Isolation</b>	
Isolation tested with	Between channels: 3 100 V DC; between channels backplane bus: 3 100 V DC; between L+ and backplane bus: 707 V DC (type test)
<b>Standards, approvals, certificates</b>	
Siemens Eco Profile (SEP)	Siemens EcoTech
Suitable for safety functions	No
Suitable for safety-related tripping of standard modules	Yes; From FS02
<b>Ecological footprint</b>	
• environmental product declaration	Yes
<b>Global warming potential</b>	
— global warming potential, (total) [CO2 eq]	43.8 kg
— global warming potential, (during production) [CO2 eq]	9.5 kg
— global warming potential, (during operation) [CO2 eq]	34.5 kg
— global warming potential, (after end of life cycle) [CO2 eq]	-0.231 kg
<b>Highest safety class achievable for safety-related tripping of standard modules</b>	
• Performance level according to ISO 13849-1	PL c
• Category according to ISO 13849-1	Cat. 2
• SIL acc. to IEC 62061	SIL 1
• remark on safety-oriented shutdown	<a href="https://support.industry.siemens.com/cs/de/en/view/39198632">https://support.industry.siemens.com/cs/de/en/view/39198632</a>
<b>Security</b>	
signed firmware update	No
safely removing data	No
data integrity	No
<b>Ambient conditions</b>	
<b>Ambient temperature during operation</b>	
• horizontal installation, min.	-25 °C; From FS02
• horizontal installation, max.	60 °C
• vertical installation, min.	-25 °C; From FS02
• vertical installation, max.	40 °C
<b>Altitude during operation relating to sea level</b>	
• Installation altitude above sea level, max.	2 000 m
<b>Dimensions</b>	
Width	35 mm
Height	147 mm
Depth	129 mm
<b>Weights</b>	


Weight, approx. 350 g

**Classifications**


	Version	Classification
eClass	14	27-24-22-04
eClass	12	27-24-22-04
eClass	9.1	27-24-22-04
eClass	9	27-24-22-04
eClass	8	27-24-22-04
eClass	7.1	27-24-22-04
eClass	6	27-24-22-04
ETIM	10	EC001419
ETIM	9	EC001419
ETIM	8	EC001419
ETIM	7	EC001419
IDEA	4	3566
UNSPSC	15	32-15-17-05

**Approvals / Certificates**

**General Product Approval**




**General Product Approval**      **For use in hazardous locations**

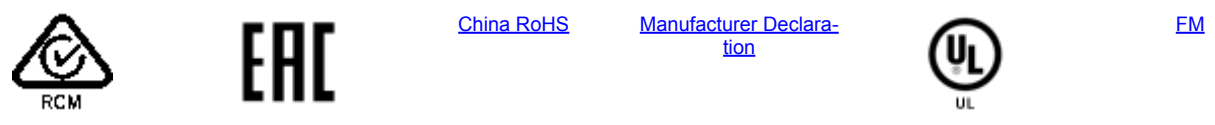

**Maritime application**



**Maritime application**      **Environment**

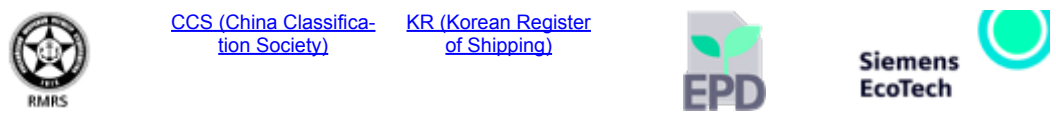

last modified: 5/7/2026