


SIMATIC S7-1500H synchronization module for patch cable up to 200 m

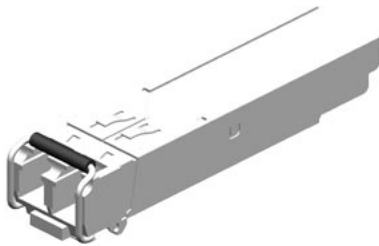

General information		
Product type designation	Synchronization module	
Engineering with	<ul style="list-style-type: none"> STEP 7 TIA Portal configurable/integrated from version 	
	STEP 7 V15.1 or higher	
Power loss		
Power loss, typ.	0.77 W	
Interfaces		
Optical interface	Yes	
<ul style="list-style-type: none"> design of optical connection 	LC	
<ul style="list-style-type: none"> wavelength of optical interface 	850 nm	
<ul style="list-style-type: none"> range (depending on optical fiber used), min. 	1 m	
<ul style="list-style-type: none"> range (depending on optical fiber used), max. 	200 m	
Ambient conditions		
Ambient temperature during operation		
<ul style="list-style-type: none"> horizontal installation, min. 	0 °C	
<ul style="list-style-type: none"> horizontal installation, max. 	60 °C	
<ul style="list-style-type: none"> vertical installation, min. 	0 °C	
<ul style="list-style-type: none"> vertical installation, max. 	40 °C	
Ambient temperature during storage/transportation		
<ul style="list-style-type: none"> min. 	-40 °C	
<ul style="list-style-type: none"> max. 	70 °C	
Dimensions		
Width	13 mm	
Height	14 mm	
Depth	58 mm	
Weights		
Weight, approx.	18 g	
Classifications		
	Version	Classification
eClass	14	27-24-22-08
eClass	12	27-24-22-08
eClass	9.1	27-24-22-08
eClass	9	27-24-22-08
eClass	8	27-24-22-08
eClass	7.1	27-24-22-08
eClass	6	27-24-22-08
ETIM	10	EC001423

ETIM	9	EC001423
ETIM	8	EC001423
ETIM	7	EC001423
IDEA	4	3564
UNSPSC	15	32-15-17-05

Approvals / Certificates

General Product Approval	Maritime application
--------------------------	----------------------



[China RoHS](#)



last modified:

11/25/2024